

680ES

Deep Cutting, Gas Powered Saw

Built to meet the operation and flexibility demands of the general construction user, the 680ES stands alone in terms of reliability and value. Easy to start with a new multifunction lever to control choke, run, and stop functions. The distinctive black powerhead houses specially designed carburetion and ignition systems that work together to ensure easy starting, cooler operation and dependable performance at just about any elevation. Available with 12-inch (30 cm) and 14-inch (35 cm) guidebars and the entire line of MAX series diamond chain.

680ES PRODUCT SPECIFICATIONS

Max Cutting Depth	14"
Bar length	up to 14 in/(35cm)
Engine Speed	11500 +/- 500 rpm (max)
Idling Speed	2800-3200 rpm
Horsepower	5 hp (3.7 kW)
Engine Type	2-stroke, single cylinder, air cooled
Displacement	4.7 cu inch (77 cc)
Powerhead Dimensions	18"L x 11.5" H x 10" W (46 cm x 29 cm x 25 cm)
Sound Power Level, Guaranteed L_{wa} (1)	101 dB(A) @3 ft (1 m)
Vibration, $a_{hv,eq}$ Concrete Cutting (2)	7.2 m/s ² (K=0.2 m/s ²) Front Handle 8.5 m/s ² (K=0.2 m/s ²) Rear Handle
Water Supply Requirement	Minimum of 20 psi (1.5 bar)
Water Flow Requirement	Minimum: 2 gpm (8 lpm)
Fuel Mix Ratio	50:1 (2%) fuel-to-oil
Fuel Capacity	0.26 gal (0.88 liter)

Now 50:1
fuel-to-oil

(1) Measured in accordance with ANSI S12.51-2012/ISO3741:2010
(2) Measured in accordance with ISO5349-1:2001 and IS 22867:2011




ICS, BLOUNT S.A. | Rue Emile Francqui 5, 1435 Mont-Saint-Guibert, Belgium | T + 32 10 301 251 · F +32 10 301 256

© Copyright 2016 ICS, Blount Inc. Privacy statement specifications subject to change without notice.

Pricing and specifications subject to change without notice. All rights reserved. ICS, WallWalker, SpeedHook, SealPRO, FORCE4 and PowerGrit are registered trademarks of ICS. The best way to cut concrete, DCT, TSS, ProFORCE and TwinMAX are trademarks of ICS.1215

Polyester air filter
designed specifically
for wet cutting

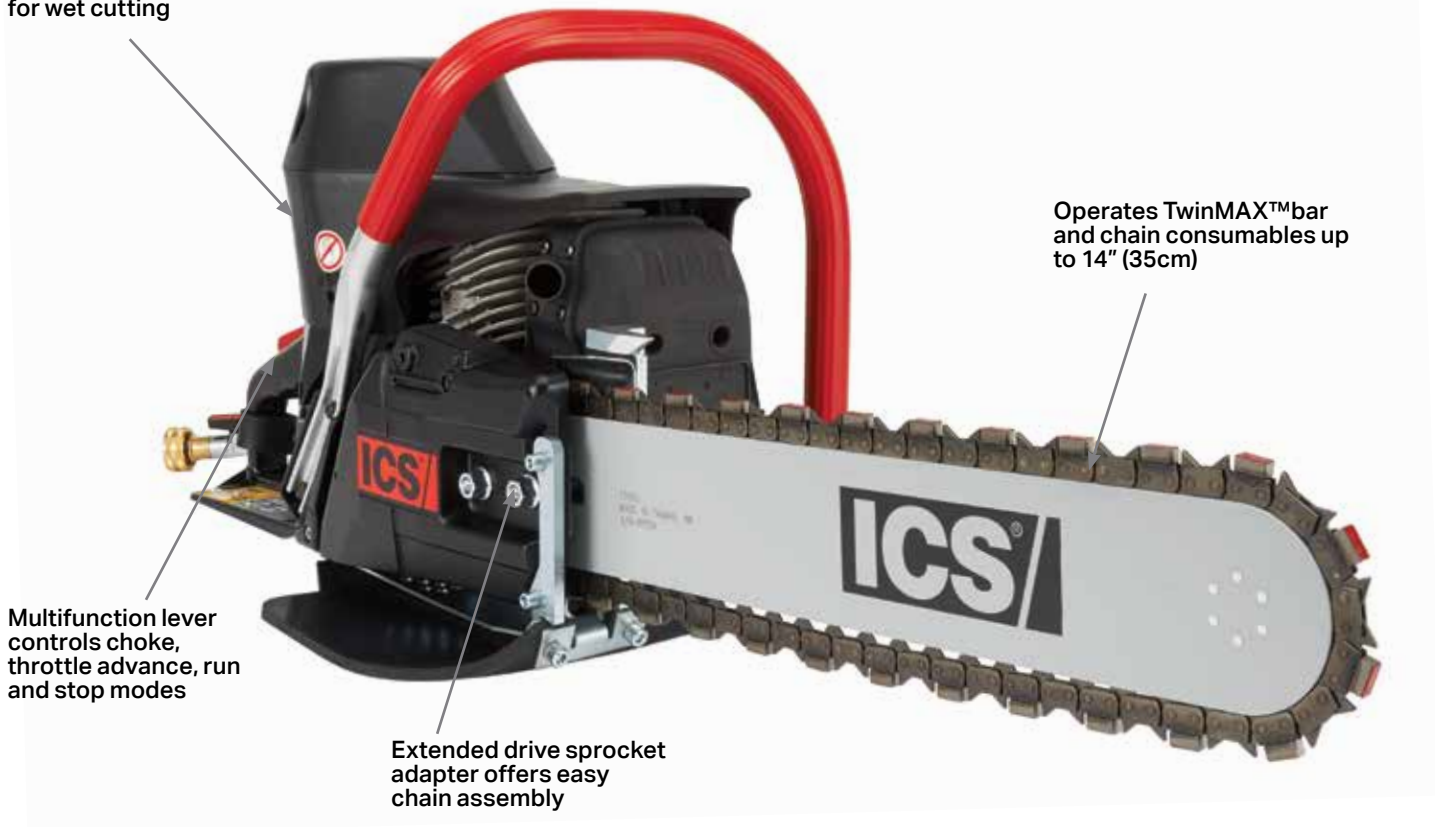


Operates TwinMAX™ bar
and chain consumables up
to 14" (35cm)

Multifunction lever
controls choke,
throttle advance, run
and stop modes

Extended drive sprocket
adapter offers easy
chain assembly




Deep cutting solution
for obstructed or small
openings



Easy tensioning of chain



Cut squares as small as
4" x 4" (10 cm x 10 cm)



Easy-to-start in all weather

ICS, BLOUNT S.A. | Rue Emile Francqui 5, 1435 Mont-Saint-Guibert, Belgium | T + 32 10 301 251 · F +32 10 301 256

© Copyright 2016 ICS, Blount Inc. Privacy statement specifications subject to change without notice.

Pricing and specifications subject to change without notice. All rights reserved. ICS, WallWalker, SpeedHook, SealPRO, FORCE4 and PowerGrit are registered trademarks of ICS. The best way to cut concrete, DCT, TSS, ProFORCE and TwinMAX are trademarks of ICS.1215